




Screw-Screwless Connectors

900 Q RZ/ 4 DS

Order Info

reference number (ref. no.)	114304
PU	500
EAN	4028012104543

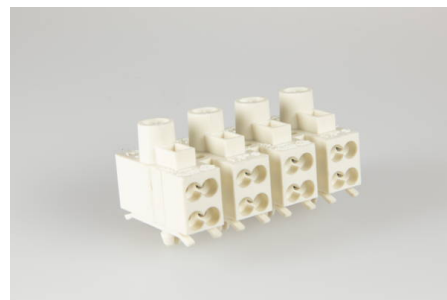

Type

Type	terminal block
connection type	screw plug-in
number of poles	4 pole
colour	white
wire protection	yes

Electrical Data

rated voltage	450 V
rated current	17.5 A

Connection Data

rated connecting capacity	1.5/2.5 mm ²
rated connecting capacity internal	1.5 mm ²
cross-sectional area (UL)	20-16 AWG
clamping range internal	0.5-1.5 mm ²
type of conductor internal	solid
type of conductor external	fine stranded, stranded, solid
stripping length internal	7.0-7.5 mm
stripping length external	8.0-8.5 mm
fixing	short catch pin
clamping units per pole	4
contact screw assembly	0.8 x 4.0 / ⚙ 0.5 Nm
wall thickness	0.5-1.4 mm

Ambient Conditions

T _{max} ambient air (at rated current)	85 °C
ammonia resistance	yes

Materials

insulator material	PA
contact material	brass

flammability rating acc. to UL 94	V-2
-----------------------------------	-----

Approvals

acc. to EN 60998	
------------------	--

acc. to UL	
------------	--

acc. to CSA	
-------------	--

Accessories

ZEL 110	196420
---------	--------