



PTKS 4/2 GR

27081.6

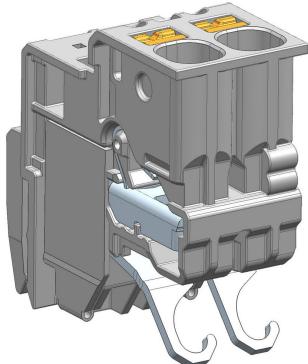

Transformer terminal, Push-in connection, Mounting type: Custom profile, Rated cross-section: 4 mm², Width: 15 mm, Colour: Grey

Commercial

General

Colour: Grey

Country of origin: BG

Customs number: 85369010

GTIN (EAN): 4044211242817

Packaging unit: 25

Product description: Transformer terminal

Quantity unit: PC

Unit of weight: G

Weight per piece (including packaging): 9.796g

Weight per piece (not including packaging): 9.532g

Technical

Dimensions

Height: 35.4mm

Length: 32.5mm

Width: 15mm

Ratings

Contamination degree: 3

Maximum power dissipation for nominal condition: 2.04W

Overvoltage category: III

Rated cross-section: 4mm²

Rated current: 32A

Rated impulse voltage: 8kV

Rated voltage: 800V

Connection data

Connection position: Top

Connection principle: Push-in connection

Connections: 2

Stripping length: 12mm

Wire cross-section AWG, max.: 10

Wire cross-section AWG, min.: 20

Wire cross-section single core (rigid)/stranded, max.: 6mm²

Wire cross-section single-core (rigid) / stranded, min.: 0.5mm²

Wire cross-section stranded with wire-end ferrules, max.: 4mm²

Wire cross-section stranded with wire-end ferrules, min.: 0.5mm²

Wire cross-section stranded, max.: 4mm²

Wire cross-section stranded, min.: 0.5mm²

Further technical data

Gauge plug acc. to EN 60 947-1: A4

Mounting type: Custom profile

Number of cross-connection channels: 1

Materials

Flammability class UL 94: V-0

Insulation housing: Polyamide 6.6

Working temperature, max.: 120°C

Working temperature, min.: -40°C

Approvals

cUL Recognized

: E95701

cUL Recognized: 1

cUL Usegroup B: rated current: 30A

cUL Usegroup B: rated voltage: 600V

cUL Usegroup C: rated current: 30A

cUL Usegroup C: rated voltage: 600V

cUL approval: C22.2 No 158

cUL wire cross-section single-core (rigid) AWG, max.: 10

cUL wire cross-section single-core (rigid) AWG, min.: 20

cUL wire cross-section stranded AWG, max.: 10

cUL wire cross-section stranded AWG, min.: 20

cUL wire material: Cu

KEMA KEUR approval

KEMA KEUR approval: EN 60947-7-1:2009

KEMA KEUR approval granted: ✓

KEMA rated current: 32A

KEMA rated impulse voltage: 8kV

KEMA rated voltage: 800V

KEMA stripping length: 12mm

KEMA wire cross-section single core (rigid), min.: 0.5mm²

KEMA wire cross-section single-core (rigid), max.: 6mm²

KEMA wire cross-section stranded with wire-end ferrules, max.: 4mm²

KEMA wire cross-section stranded with wire-end ferrules, min.: 0.5mm²

KEMA wire cross-section stranded, max.: 4mm²

KEMA wire cross-section stranded, min.: 0.5mm²

UL Recognized

UL File Number: E95701

UL Recognized: 1

UL Usegroup B: rated current: 30A

UL Usegroup B: rated voltage: 600V

UL Usegroup C: rated current: 30A

UL Usegroup C: rated voltage: 600V

UL approval: UL 1059

UL factory wiring: ✓

UL field wiring: ✓

UL wire cross-section single-core (rigid) AWG, max.: 10

UL wire cross-section single-core (rigid) AWG, min.: 20

UL wire cross-section stranded AWG, max.: 10

UL wire cross-section stranded AWG, min.: 20

UL wire material: Cu

Environment

Environmental Product Compliance

EU-POP Conform: Yes

PROP 65 Conform: Yes

REACH Candidate Substance Note: No

REACH Conform: Yes


REACH Reference date: 2025-06-25

RoHS Conform: Yes

TSCA Conform: Yes

Accessories

Quick marking



PMC SB 7,5/40 So WH

3327.7



PC/HF-SB 7,5x4/60 WH

33638.7


Test plug



PS 2,3

2007.0

Partition plate



TW PTKS OG

27093.3
