

FERROXCUBE



a



b



c





d




e



f

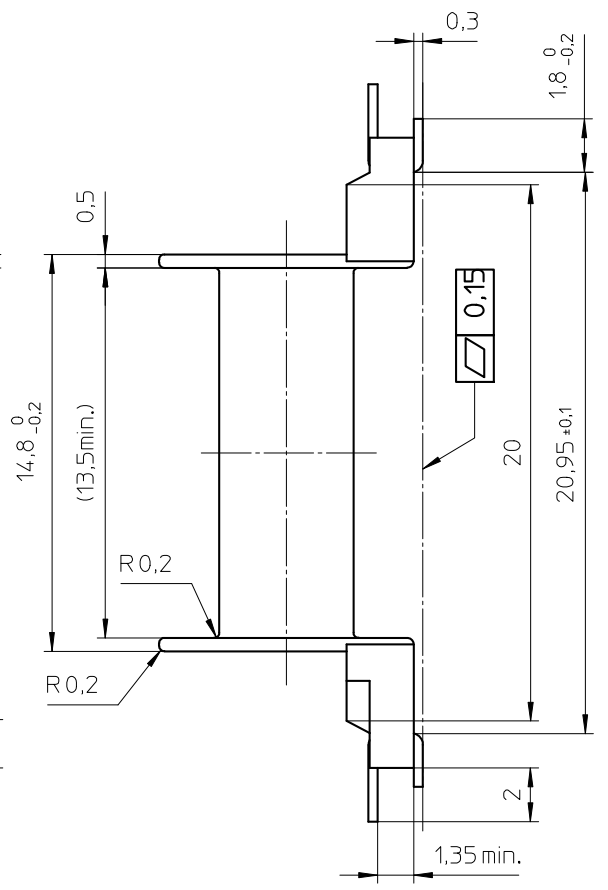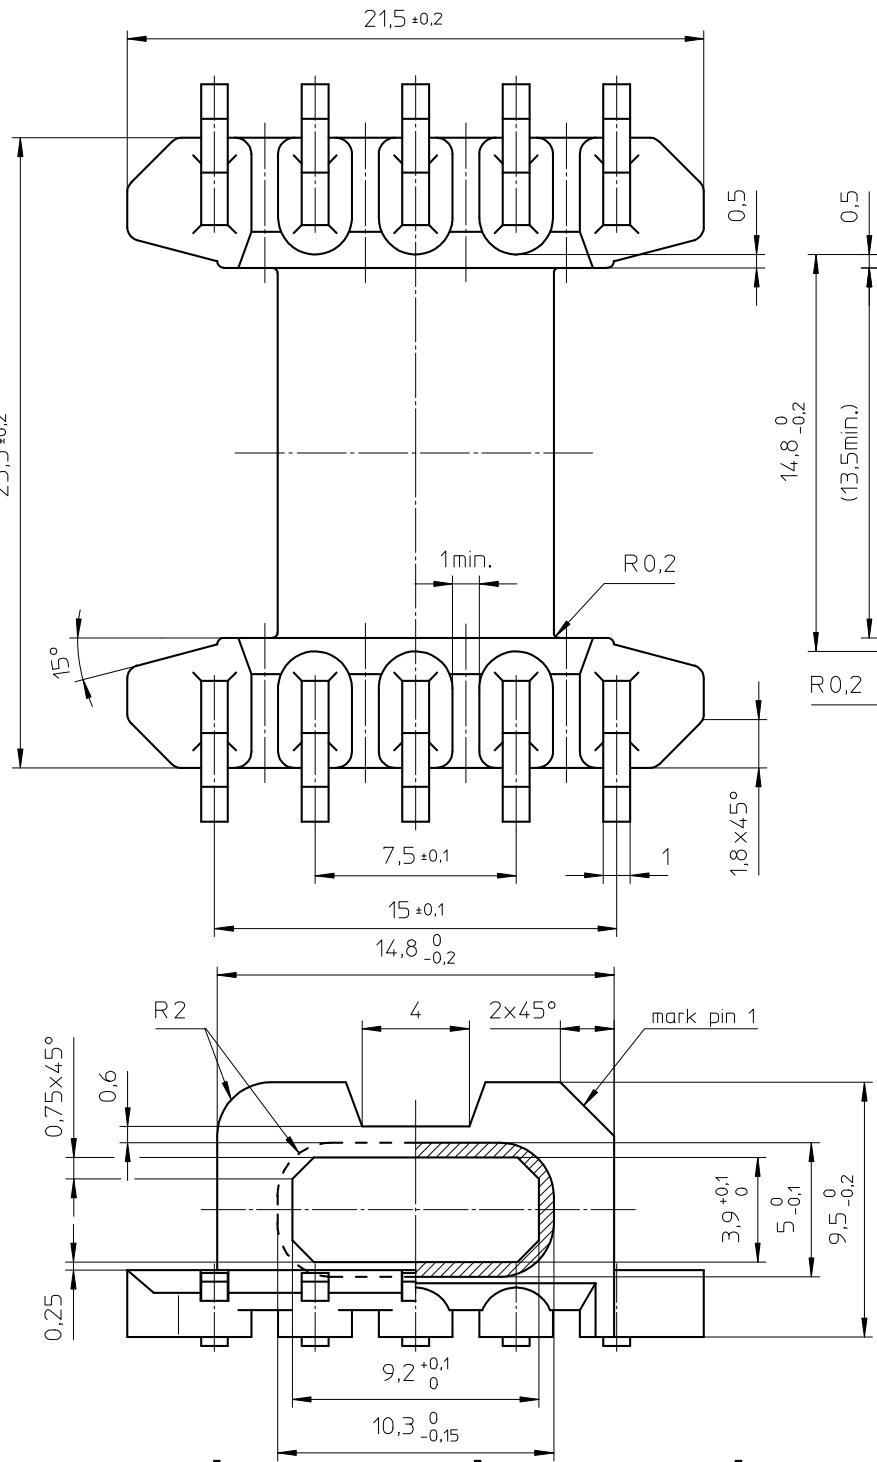

PROPOSED PAD ARRANGEMENT :

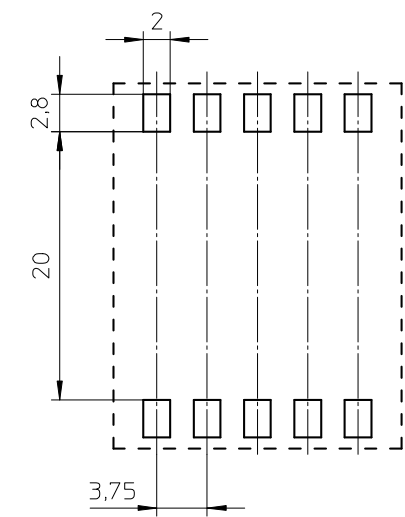

Coil former material: Vectra C130 (LCP), glass-reinforced.
 UL file number: E83005(M) - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s

Min. winding area: 27,7 mm².

Mean length of turn: 34,1 mm.

CLASSNO.	CPHS-EFD20/7-1S-10P		4322 021 00071	06-06-28	2011-05-25
96-05-20					
NAME NAAM	M.Tryngiel	SUPERS. VERV.	001	SPEL BL	112 - 001
MPA	CHECK CONTR.	DAT.	92-03-27	Property of Eigenaam van	069
			© FERROXCUBE 2000		A3