


PROPOSED PAD ARRANGEMENT:

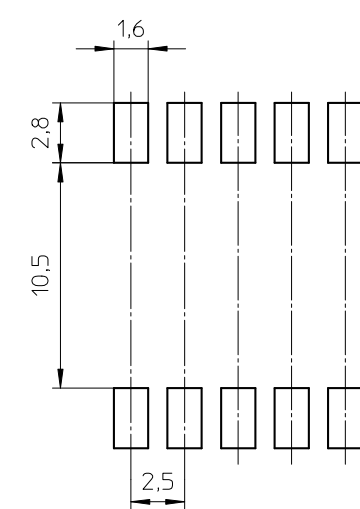

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.

Pin material: CuSn, Sn plated.


Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area: 13.5 mm<sup>2</sup>.

Mean length of turn: 23.8 mm.



CLASSNO.		CSHS-EP13-1S-10P-T		4322 021 03201		1999-01-05
2000-08-28						2000-08-28
NAME NAAM		M.Marszalek		SUPERS. VERV.		001
MPA		CHECK CONTR.		DAT.		99-01-05
		Property of Eigendom van		© FERROXCUBE 2000		112 - 001
						069
						A3